



1-895

Vibration Switch



Applications

- Industrial Fans
- Compressors
- Centrifugal Pumps
- Motors
- Cooling Towers

Features

- Dual Alarms
- 3-digit LCD display
- 30-second start-up trip delay, prevents false alarms
- 4-20 mA output
- Velocity or Displacement response

Monitoring Systems

Description

The 1-895 is a versatile multi-purpose Vibration Switch. It features a built-in accelerometer and solid state electronics. The 1-895 is available in a variety of ranges.

The 1-895 constantly monitors the vibration levels on critical machinery and provides timely feedback in the event of machine breakdown. There is a 30-second monitor start-up delay that is initiated by the application of power or the grounding of the start input.

The delay does not begin until the start input is released. The current vibration level is displayed on a 3-digit LCD, and output on a proportional 4-20 mA current loop. The alarm levels are set by two front-panel push-buttons and the display. Two alarm indicators are present and indicate when an alarm level is exceeded. The corresponding output is also enabled. The alarms are latched and must be reset at the 1-895 or via a remote alarm reset input.



1-895 Vibration Switch

Performance Specifications

Vibration Range (See ordering guide)

Velocity:	inches per second (ips), peak
Acceleration:	g's, peak
Displacement:	mils, peak-peak
Frequency Range:	5 Hz to 500 Hz ± 3 dB (internal sensor)
Alarm Setpoints:	User programmable 0 - full scale
Alarm Outputs:	Dual alarm relays are isolated from system electronics
Analog Output:	4-20 mA current loop proportional to the full scale output
Alarm reset / start inputs:	External inputs must be shorted to return to activate
Display:	3-digit LCD display
Power:	18-30 VDC @ 125 mA
Temperature Range	
Operating:	0°F to +185°F (-18°C to +85°C)
Storage:	-67°F to +185°F (-55°C to +85°C)
Humidity:	0 to 95% relative humidity non-condensing

I/O Connections

Power Connections:	+24 VDC -Return (24 VDC)
Analog Output:	4-20 mA+ 4-20 mA-
Control Inputs:	Start Input Reset Input
Alarms:	1 Out - 1 Out + 2 Out - 2 Out +

Ordering Information

In keeping with CEC's policy of continuing product improvement, specifications may be changed without notice.

ORDERING GUIDE

P/N 1-895 - A B C C

A	SENSOR INPUT TYPE			
	0 = Internal Sensor Remote Sensor Options			
A	1 = 100 mV/g	constant current (use with CEC model 4-160)		
	2 = 100 mV/ips	constant current (use with CEC model 4-161)		
	3 = 100 mV/ips	velocity coil		
	4 = 145 mV/ips	velocity coil (use with CEC model 4-130/137, 4-131, 4-138-0002)		
	5 = 150 mV/ips	velocity coil (use with CEC P/N 4-131-0103, 4-138-0003)		
	6 = 200 mV/ips	velocity coil (use with CEC P/N 4-131-0116, 368925, 4-138-0004)		
B	RELAY TYPE (Solid state, Optically isolated)			
	0 = DC contact rating is 3 to 60 VDC @ 1 Amp 1 = AC contact rating is 12 to 240 VAC @ 1 Amp			
C	OUTPUT TYPE (Full Scale Range & Unit of Measure)			
	Displacement		Velocity	
	01 = 0-5 mils, pk-pk	10 = 0-0.5 ips, peak	21 = 0-5 g's, peak	31 = 3-40 mm/s, peak
	02 = 0-10 mils, pk-pk	11 = 0-1 ips, peak	22 = 0-10 g's, peak	32 = 6-80 mm/s, peak
	03 = 0-20 mils, pk-pk	12 = 0-2 ips, peak	23 = 0-25 g's, peak	
	04 = 0-150 mils, pk-pk	13 = 0-5 ips, peak	25 = 0-5 g's, rms	
	05 = 0-100 mils, pk-pk	14 = 0-10 ips, peak	26 = 0-10 g's, rms	
		15 = 0-1.5 ips, rms		
		16 = 0-3 ips, rms		

NOTE: Special configurations can be accommodated. Please consult the factory for assistance.

Example: P/N 1-895 - 0 0 1 2

The example unit is housed in an explosion proof enclosure. This switch has an internal sensor, and DC relay contacts. The display and 4-20 mA output are scaled for 0 to 2 ips, peak velocity.

© 2007 CEC Vibration Products Inc. All rights reserved.

Hazardous Approvals




North America

CSA C/US Class I, Division 2, Groups A, B, C and D
Temp code T5; Max Ambient +85°C



European

ATEX EEx d IIC T5
Ta = -40°C to +85°C

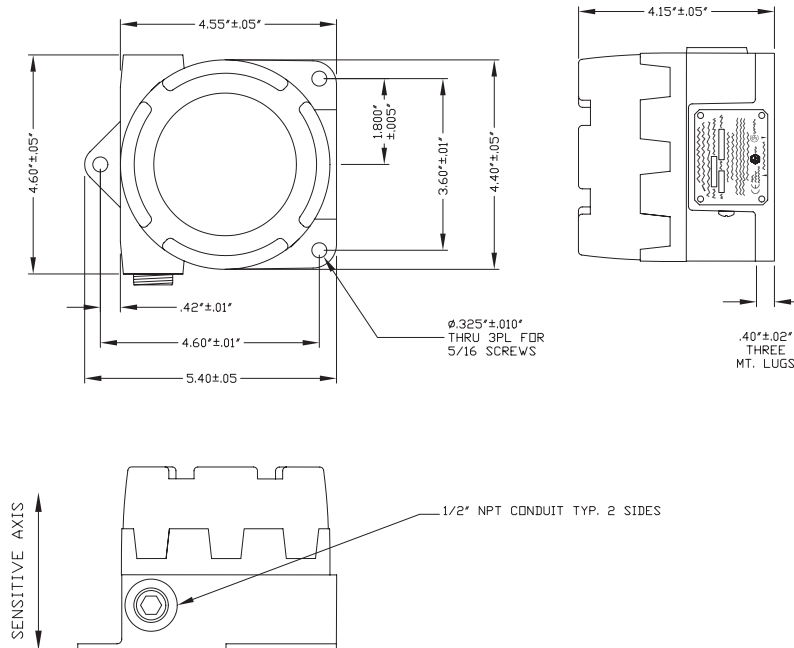



1-828

Radial Displacement Transmitter



Applications

- Turbine / Generator Sets
- Fans or Blowers
- Motors
- Gear Boxes
- Bearing Caps

Features

- 4-20 mA output proportional to mils Peak-to-Peak displacement
- Compatible with major probe types
- DIN Rail mountable
- Probe failure detect modes
- BNC buffered output and Gap voltage

Description

The 1-828 series radial displacement transmitters continue the successful line of vibration transmitters designed and manufactured by CEC. These single channel signal conditioners interface with proximity transducers like the 3300, 3300XL and 7200 series or probe types with similar specifications.

Each unit provides a calibrated 4-20 mA output that is proportional to the radial peak to peak displacement vibration sensed by the transducer and extension system. The probe Gap and buffered dynamic signal are easily accessed via the front panel BNC.

Probe failure conditions are quickly identified via the multicolored status LED and the 4-20 mA output. This unique feature allows for instant feedback of the probe system condition during installation or machine operation.

Monitoring Systems





1-830

Axial Displacement Transmitter



Applications

- Turbine / Generator Sets
- Fans or Blowers
- Motors
- Gear Boxes
- Bearing Caps

Features

- 4-20 mA output proportional to targets axial position
- Compatible with major probe types
- DIN Rail mountable
- Probe failure detect modes
- BNC buffered output and Gap voltage

Monitoring Systems

Description

The 1-830 series axial displacement transmitters continue the successful line of vibration transmitters designed and manufactured by CEC. These single channel signal conditioners interface with proximity transducers like the 3300, 3300XL and 7200 series or probe types with similar specifications.

Each unit provides a calibrated 4-20 mA output that is proportional to the targets axial position as sensed by the transducer and extension system. The probe Gap and buffered dynamic signal are easily accessed via the front panel BNC.

Probe failure conditions are quickly identified via the multicolored status LED and the 4-20 mA output. This unique feature allows for instant feedback of the probe system condition during installation or machine operation.

